



W. www.bluebits.ca

P. +1 (833) 258 3269

E. marketing@bluebits.ca






Contents


Locker Compartment Dimensions	P2
Master Unit Specifications	P3
Add-On Unit Specifications	P4
Half Master Unit Specifications	P5
Half Add-On Unit Specifications	P6
Technical Specifications	P7
Installation Requirements	P8
Alcove Guidelines	P9
Locker Construction	P10
Accessibility Considerations	P11
Workflow for Collection of Packages	P12
Workflow for Carriers to Deposit Packages	P13-14

Locker Compartment Dimensions

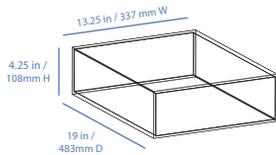


Small Compartment

Width 13.25in | Height 4.25in
Depth 19in

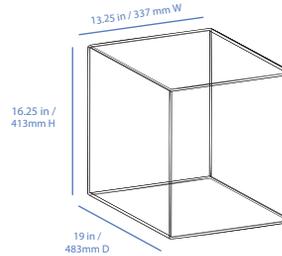


Large Compartment

Width 13.25in | Height 16.25in
Depth 19in

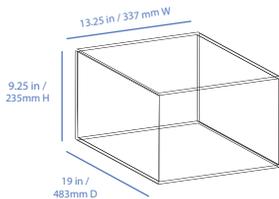

Medium Compartment

Width 13.25in | Height 9.25in
Depth 19in

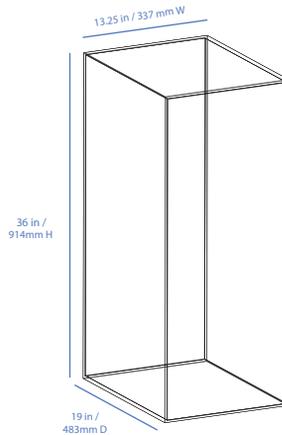

Extra Large Compartment


Width 13.25in | Height 36in
Depth 19in

Master Unit Specifications

Master Unit

- 78in H x 19.7in D x 36.2in W
- 1080p Touchscreen (1920x1080 pixels, 16:9 aspect ratio)
- Control board
- Surge protection
- A master unit is required with every installation
- Compartment layout customizable upon request

(* 80in height with leveling feet)

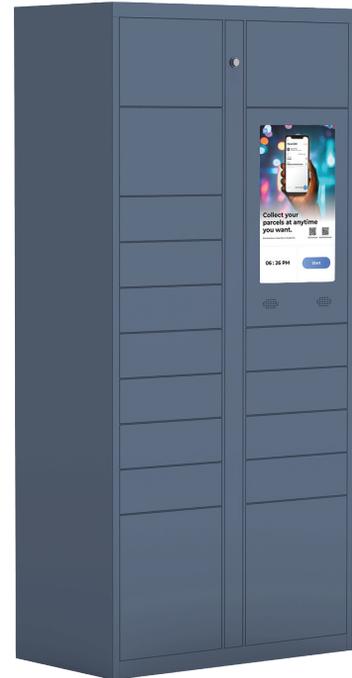

Add-On Unit Specifications

20-Door Add-On

- 78in H x 19.7in D x 35.4in W
- 14 small locker compartments
- 4 medium locker compartments
- 2 large locker compartments



20 door add-on






8 door add-on



6 door add-on

8-Door Add-On

- 78in H x 19.7in D x 35.4in W
- 8 large locker compartments

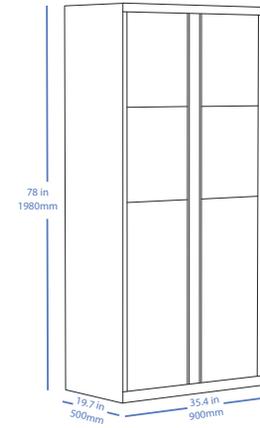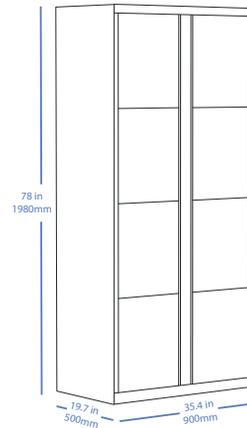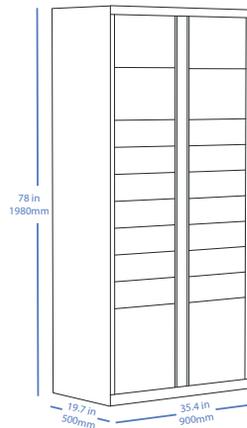

6-Door Add-On

- 78in H x 19.7in D x 35.4in W
- 4 large locker compartments
- 2 extra large locker compartments


(* 80in height with leveling feet)

Half Master Unit Specifications

Half Master Unit

- 78in H x 19.7in D x 20.5in W
- 1080p Touchscreen (1920x1080 pixels, 16:9 aspect ratio)
- Control board
- Surge protection
- A master unit is required with every installation

(* 80in height with leveling feet)

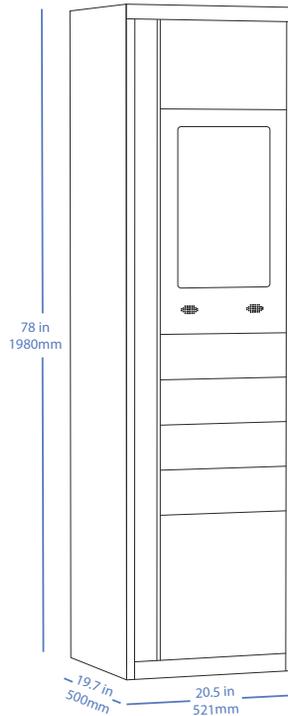

Half Add-On Unit Specifications

10-Door Half Add-On

- 78in H x 19.7in D x 19.7in W
- 7 small locker compartments
- 2 medium locker compartments
- 1 large locker compartment



10-Door Half Add-On






4-Door Half Add-On



3-Door Half Add-On

4-Door Half Add-On

- 78in H x 19.7in D x 19.7in W
- 4 large locker compartments

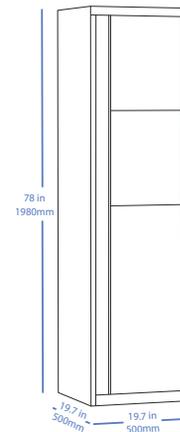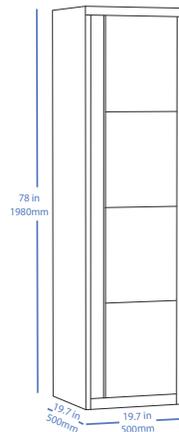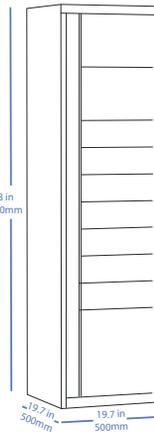

3-Door Half Add-On

- 78in H x 19.7in D x 19.7in W
- 2 large locker compartments
- 1 extra large locker compartment

(* 80in height with leveling feet)

Technical Specifications

Leveling

Leveling feet
(* Locker height 80in with leveling feet)

Weight (kg)

92 kg (200 lbs)

Rating (v)

12V

Rated Power (w)

60W

Operating Temperature

-30°C to 45°C
(-22°F to 113°F)

AC Voltage

Recommended: 120VAC
Minimum: 110VAC
50/60Hz nominal

Ethernet / WiFi

CAT 5 or 6 Jack or 2.4G private network with no terms & conditions to acknowledge

Available Accessories

SIM card, Router, Ethernet Cable,
Extension Cable, Extension Card, Roofing etc.
(* additional fee may apply)

Installation Requirements



Placement

- Lockers can be installed either all along one wall, or an L-shape formation
- Lockers can also be embedded in a custom space, to appear flush against a wall
- A minimum ceiling height clearance of **8 feet (96 inches)** is required to allow for safe delivery, movement, and installation of lockers.

Best Location

- Lockers must be in location protected from the elements
- Providing 24/7 locker access is recommended
- Lockers can be installed outdoors, but there are certain conditions. Please contact us for the details.


Power Supply

- One 120 VAC duplex outlet near the lockers
- Our products are certified under the Canadian electrical safety authority certification with the (UL) Underwriters Laboratories of Canada approval

Internet Requirements

- Wifi, ethernet, or SIM connection
- 2.4G private network, with less than 10 devices connected

Alcove Guidelines

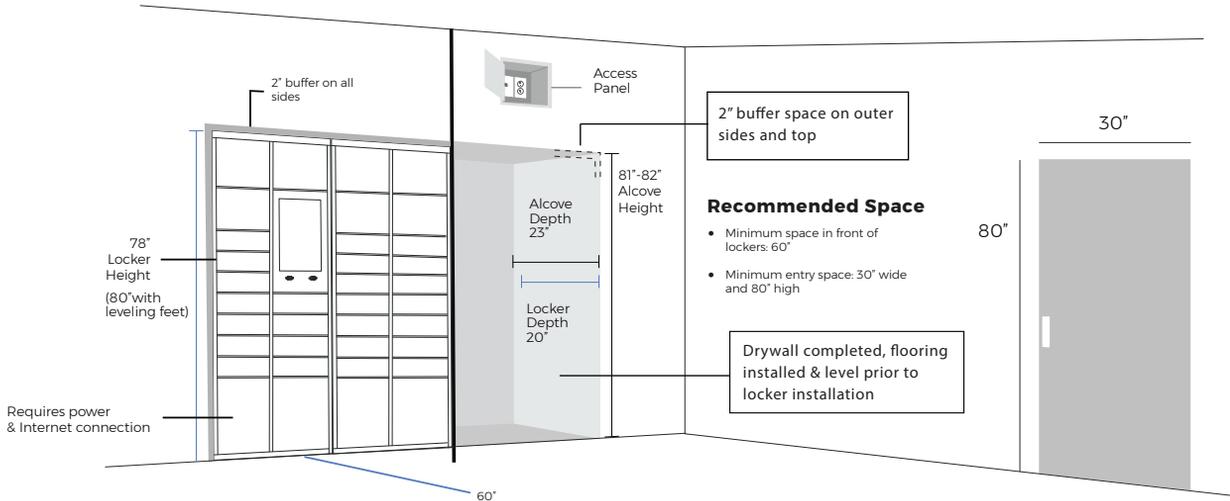

Alcove Spacing Requirements

Use these measurements to ensure that there is enough space to install and level the lockers

Height: Minimum 81"-82" alcove height required. This accommodates 80" tall leveled lockers with a buffer

Depth: Minimum 23" alcove depth required.

Buffer: There must be a 2" buffer on all outer sides to ensure the lockers fit into the space properly

Additional Alcove Guidelines

Access panel: Install an access panel to allow future access to power & data. Recessed space behind the access panel must be accessible from inside alcove & above lockers, recommended placement is above the Master unit

Flooring: Alcoves should be level with the room's floor. The floor surface inside the alcove must be leveled before installation

Floor Plan: Note that your BlueBox floor plan will reflect finished dimensions, as opposed to rough openings

Locker Construction

Standard Colour

Locker stock available



Electronic Parts

- 21" Touch screen display
- Router
- Secure Locks
- Circuit Board
- 2 Embedded Speakers

Superior Construction

- Heavy duty, corrosion resistant galvanized steel for long-term durability

*Minimal BlueBox branding standard on all locker variations

Customization

- Custom colours are available. Please ask our sales representative for more information

Custom Colour/Locker Customization

Select any colour shade from the RAL K7 classic colour chart or customize a locker unit. Approx. 4-6 months wait time



Operating system

- Android 5.1

Locker Material


- Galvanized Steel



Accessibility Considerations



- ✓ Designed with accessibility in mind
- ✓ Residents can manage accessibility settings in BlueBox app under account settings
- ✓ Parcels can be collected in 3 seconds by using the BlueBox app

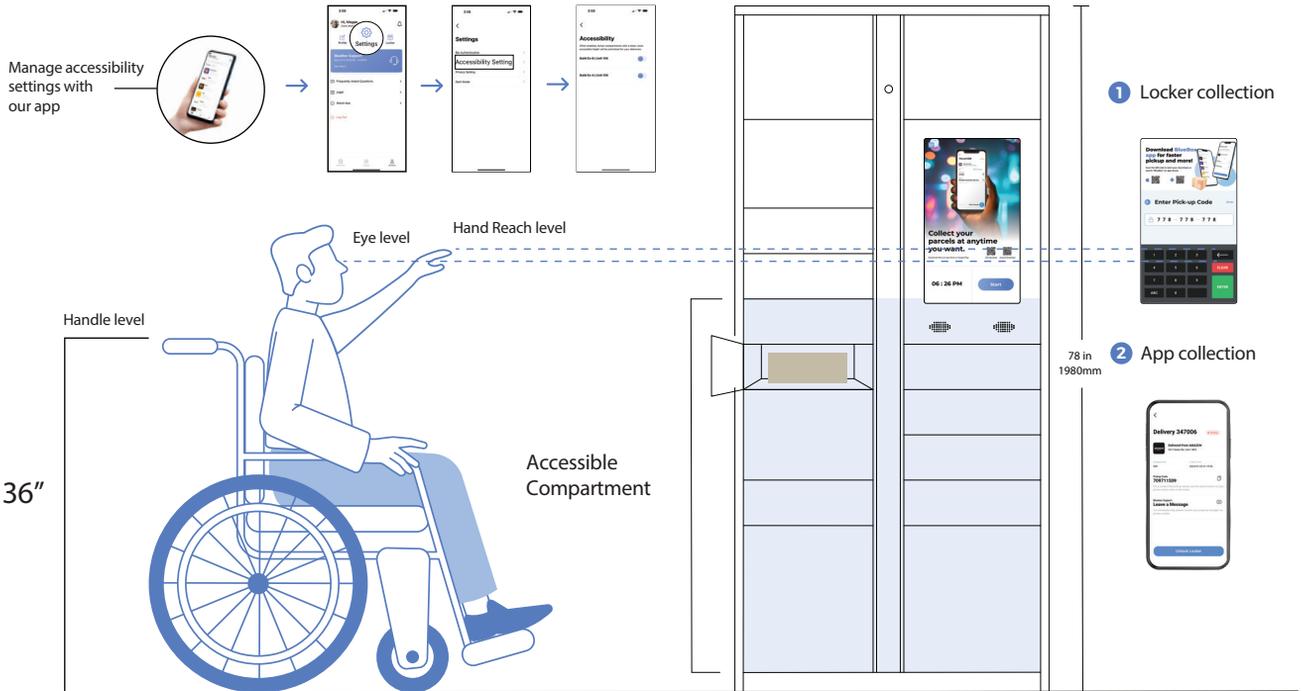

Workflow for Collection of Packages

Step 01




Tap "Start"
to Continue

Step 02




Choose Your
Language

Step 03

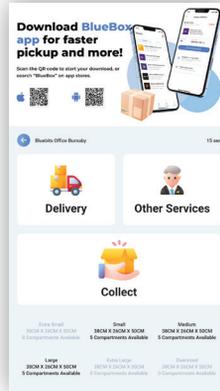

Choose "Collect"

Step 04

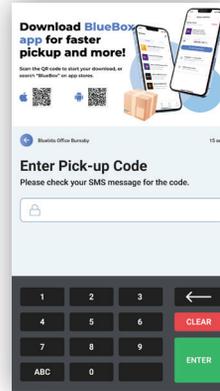

Enter Pickup
Code or Open via
BlueBox App

Step 05



Collect Your
Delivery and Close
the Compartment

Workflow for Carriers to Deposit Packages

Step 01




Tap "Start"
to Continue

Step 02




Choose Your
Language

Step 03

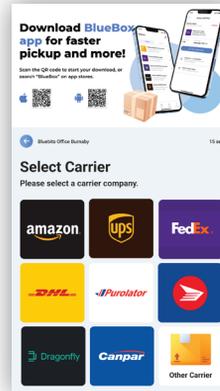

Choose Carrier
Company

Step 04

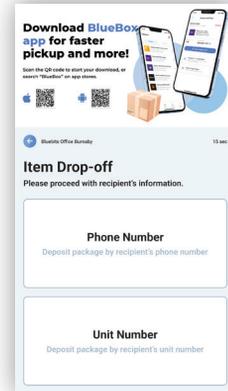

Choose Deposit
Method

Workflow for Carriers to Deposit Packages

Step 05




#Option1: Enter Recipient Phone Number

Step 05




#Option2: Enter Recipient's Unit Number

Step 06

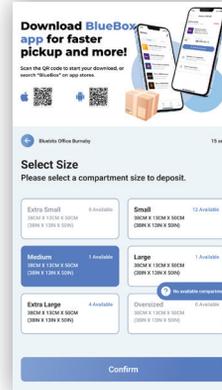

Select Compartment Size

Step 07

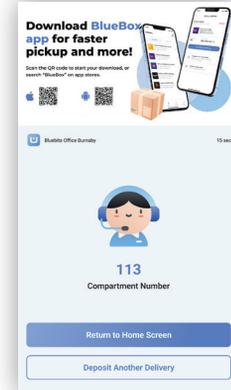

Package Delivered



 **BlueBox**